


ALL NEW 60 CELLS MONO SOMERA ULTIMA SILVER SERIES



Extremely **NARROW POWER BINNING TOLERANCE** of +2.5 Wp to reduce current mismatch loss in single string

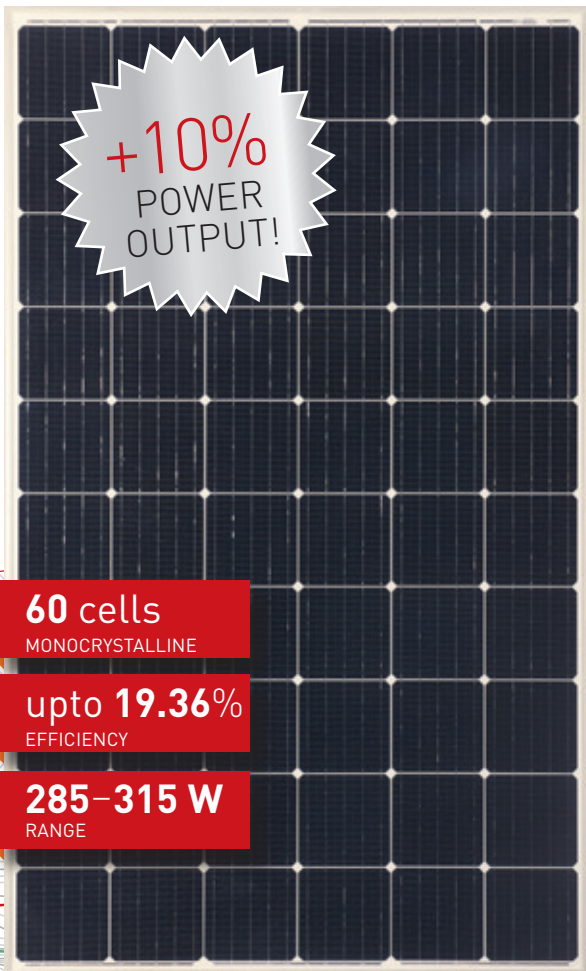

Engineered to provide **EXCELLENT LOW LIGHT** and **LONGER WAVELENGTH RESPONSE**



EXTREMELY RELIABLE PRODUCT suiting harsh environment conditions withstanding 2400Pa Wind load, 5400Pa Snow load and Dynamic Wind load



Using highly efficient **PASSIVATED EMITTER REAR CONTACT TECHNOLOGY (PERC)** cells



10% HIGHER POWER OUTPUT compared to industry average poly crystalline module



QUALITY AND SAFETY

- ♦ 27 years of linear power output warranty **
- ♦ Rigorous quality control meeting the highest international standards
- ♦ 100% EL tested to ensure micro crack free modules
- ♦ Certified for PID resistance
- ♦ Certified for salt mist corrosion resistance – severity VI
- ♦ Certified for ammonia resistance
- ♦ Certified for sand and dust test

APPLICATIONS

- ♦ On-grid large scale utility systems
- ♦ On-grid rooftop residential and commercial systems
- ♦ Off-grid residential systems

TECHNICAL DATA

SOMERA ULTIMA SILVER SERIES

THIS DATASHEET IS APPLICABLE FOR: SOMERA VSM.60.AAA.03.04 (AAA=285-315)

Electrical Data^{1,2} All data refers to STC

Peak Power P_{max} (Wp)	285.0	287.5	290.0	292.5	295.0	297.5	300.0	302.5	305.0	307.5	310.0	312.5	315.0
Maximum Voltage V_{mpp} (V)	32.1	32.2	32.3	32.4	32.5	32.6	32.7	32.8	32.9	33.0	33.1	33.2	33.3
Maximum Current I_{mpp} (A)	8.87	8.93	8.97	9.03	9.08	9.13	9.18	9.23	9.27	9.32	9.37	9.42	9.47
Open Circuit Voltage V_{oc} (V)	39.7	39.8	39.9	40.0	40.1	40.2	40.3	40.4	40.5	40.6	40.7	40.8	40.9
Short Circuit Current I_{sc} (A)	9.35	9.41	9.46	9.52	9.58	9.64	9.68	9.74	9.80	9.86	9.91	9.97	10.02
Module Efficiency η (%)	17.52	17.67	17.83	17.98	18.13	18.29	18.44	18.59	18.75	18.90	19.05	19.21	19.36

1) STC: 1000 W/m² irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 5% at 200 W/m² according to EN 60904-1. | 2) Power measurement uncertainty is within +/- 3%.

Electrical Parameters at NOCT³

Power (W)	211.0	213.0	215.0	216.0	218.0	220.0	222.0	224.0	226.0	227.0	229.0	231.0	233.0
$V@P_{max}$ (V)	30.5	30.6	30.7	30.8	30.9	31.0	31.1	31.2	31.3	31.4	31.5	31.6	31.7
$I@P_{max}$ (A)	6.95	7.00	7.03	7.08	7.12	7.15	7.20	7.23	7.27	7.31	7.35	7.39	7.43
V_{oc} (V)	38.4	38.4	38.6	38.6	38.8	38.8	38.9	39.0	39.1	39.2	39.3	39.4	39.5
I_{sc} (A)	7.42	7.46	7.50	7.55	7.60	7.65	7.68	7.73	7.77	7.82	7.86	7.91	7.95

3) NOCT irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/sec

Temperature Coefficients (Tc) permissible operating conditions

Tc of Open Circuit Voltage (β)	-0.28%/°C
Tc of Short Circuit Current (α)	0.057%/°C
Tc of Power (γ)	-0.39%/°C
Maximum System Voltage	1000 V
NOCT	45°C ± 2°C
Temperature Range	-40°C to + 85°C

Mechanical Data


Length × Width × Height	1640 × 992 × 40 mm (64.57 × 39.05 × 1.57 inches)
Weight	18.50 kg (40.79 lbs)
Junction Box	IP67, 3 Bypass diodes
Cable & Connectors	1200 mm (47.24 inches) length cables, MC4 Compatible/MC4 Connectors
Application Class	Class A (Safety class II)
Superstrate	3.2 mm (0.13 inches) high transmission low iron tempered glass, AR coated
Cells	60 Monocrystalline, 5BB solar cells
Cell Encapsulant	EVA (Ethylene Vinyl Acetate)
Back Sheet	Composite film
Frame	Anodized aluminium frame with twin wall profile
Mechanical Load Test	5400 Pa (Snow load), 2400 Pa (wind load)
Maximum Series Fuse Rating	15 A

Warranty and Certifications


Product Warranty**	12 years
Performance Warranty**	Linear Power Warranty for 27 years with 3% for 1st year degradation and 0.65% from year 2 to year 27
Approvals and Certificates	IEC 61215 Ed2, IEC 61730, IEC 61701, IEC 62716, IEC 60068-2-68, MCS, PV Cycle*, CEC (Australia)*, JET*, UL1703

* All (*) certifications under progress. ** Refer to Vikram Solar's warranty document for terms and conditions.


Dimensions in mm

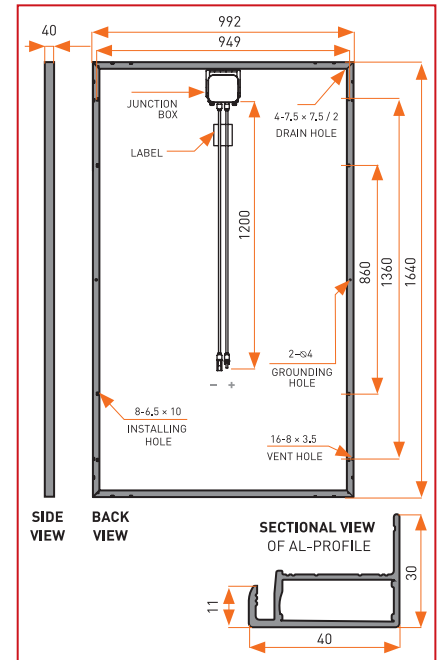

Typical Electrical Curves

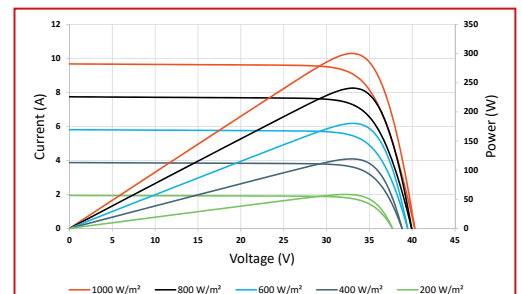

Performance Warranty

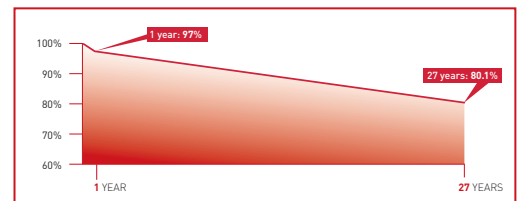

Packaging Information

Quantity/Pallet	25
Pallets/Container (40' HC)	28
Quantity/Container (40' HC)	700

CAUTION: READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.

Specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order.

Share Your Query :

Samaarambh Solar Power Private Limited | Call: +919252389830,+919812406261 | production@solarsebijli.com | web: www.solarsebijli.com