

# ELDORA

HIGH EFFICIENCY POLY-Si PV MODULES

  
**vikramsolar**

CREATING CLIMATE FOR CHANGE

ELDORA VSP.60.AAA.05 | POLYCRYSTALLINE SOLAR PV MODULES | 60 CELLS | 265-290 WATT

# ELDORA ULTIMA

## SILVER 1500V SERIES



### HIGHER OUTPUT OF MODULE POWER

by reducing cell to module power loss



### MAXIMUM SYSTEM VOLTAGE

INCREASED TO 1500VDC (IEC & UL),  
increased string length, low BOS cost



### Extremely RELIABLE PRODUCT

suiting all environment conditions



### Engineered to provide EXCELLENT

### LOW LIGHT RESPONSE



### Extremely NARROW POWER binning

tolerance to reduce current mismatch  
loss in single string



### QUALITY AND SAFETY

- ◆ 27 years of linear power output warranty \*\*
- ◆ Rigorous quality control meeting the highest international standards
- ◆ 100% EL tested to minimise micro crack
- ◆ Excellent anti-PID performance

- ◆ Certified for salt mist corrosion resistance – severity VI
- ◆ Certified for ammonia resistance
- ◆ 3rd Party validated PAN file

### APPLICATIONS

- ◆ On-grid large scale utility systems
- ◆ On-grid rooftop residential and commercial systems
- ◆ Off-grid residential systems

# TECHNICAL DATA

## ELDORA ULTIMA SILVER 1500V SERIES

THIS DATASHEET IS APPLICABLE FOR: ELDORA VSP.60.AAA.05 (AAA=265-290)

### Electrical Data<sup>1,2</sup> All data refers to STC (AM 1.5, 1000 W/m<sup>2</sup>, 25°C)

Parameter	265	270	275	280	285	290
Peak Power P <sub>max</sub> (Wp)	265	270	275	280	285	290
Maximum Voltage V <sub>mpp</sub> (V)	30.9	31	31.2	31.3	31.5	31.7
Maximum Current I <sub>mpp</sub> (A)	8.58	8.71	8.82	8.95	9.05	9.16
Open Circuit Voltage V <sub>oc</sub> (V)	38.1	38.3	38.5	38.6	38.9	39.1
Short Circuit Current I <sub>sc</sub> (A)	9.03	9.12	9.22	9.35	9.45	9.54
Module Efficiency η(%)	16.29	16.60	16.90	17.21	17.52	17.83

1) STC:1000 W/m<sup>2</sup> irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3. | 2) Power measurement uncertainty is within +/- 3%.

### Electrical Parameters at NOCT<sup>3</sup>

Parameter	196.6	200.1	204.3	207.9	211.7	215.5
Power (W)	196.6	200.1	204.3	207.9	211.7	215.5
V@P <sub>max</sub> (V)	28.5	28.6	28.8	28.9	29.1	29.2
I@P <sub>max</sub> (A)	6.89	6.99	7.09	7.19	7.29	7.37
V <sub>oc</sub> (V)	35.1	35.3	35.5	35.6	36.0	36.2
I <sub>sc</sub> (A)	7.31	7.38	7.46	7.57	7.65	7.72

3) NOCT irradiance 800 W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1 m/sec

### Temperature Coefficients (Tc) permissible operating conditions

Tc of Open Circuit Voltage (β)	- 0.29%/°C
Tc of Short Circuit Current (α)	0.057%/°C
Tc of Power (γ)	-0.38%/°C
Maximum System Voltage	1500 V
NOCT	45°C±2°C
Temperature Range	-40°C to + 85°C

### Mechanical Data

Length × Width × Height	1640 × 992 × 40 mm (64.57 × 39.06 × 1.57 inches)
Weight	18.50 kg (40.79 lbs)
Junction Box	IP68/67, 3 bypass diodes
Cable & Connectors	1200 mm (47.24 inches) length cables, MC4 Compatible/MC4 Connectors
Application Class	Class A (Safety class II)
Superstrate	3.2 mm (0.13 inches) high transmission low iron tempered glass, AR coated
Cells	60, 5BB Polycrystalline solar cells
Cell Encapsulant	EVA (Ethylene Vinyl Acetate)
Back Sheet	Composite film
Frame	Anodized aluminium frame with twin wall profile
Mechanical Load Test	5400 Pa (Snow load), 2400 Pa (Wind load)
Maximum Series Fuse Rating	15 A


### Warranty and Certifications

Product Warranty**	12 years
Performance Warranty**	Linear Power Warranty for 27 years with 2.5% for 1st year degradation and 0.67% from year 2 to year 27
Approvals and Certificates	IEC 60068-2-68, IS 14286, IS/IEC 61730, IEC 61215 Ed2, IEC 61730, IEC 61701, IEC 62716, IEC 62804, UL1703*, CE*, MCS, PV Cycle*, CAN/CSA 61730, CEC (California)*


\* All (\*) certifications under progress.

\*\* Refer to Vikram Solar's warranty document for terms and conditions. | \* CEC (California) power range upto 275 Wp

### Dimensions in mm

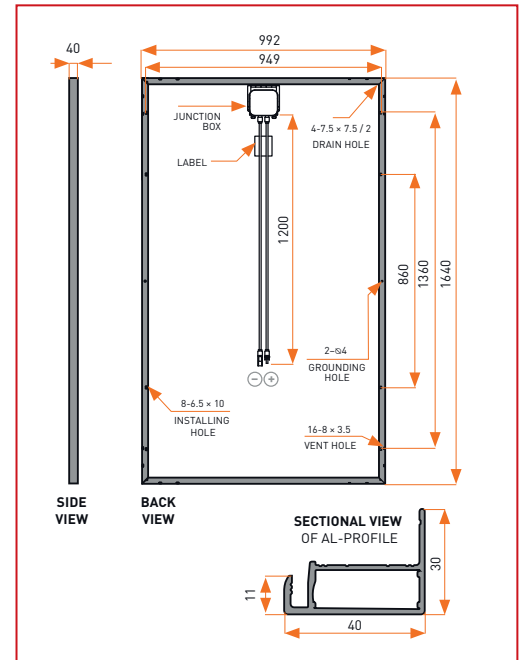


### Typical I-V Curves<sup>4</sup>

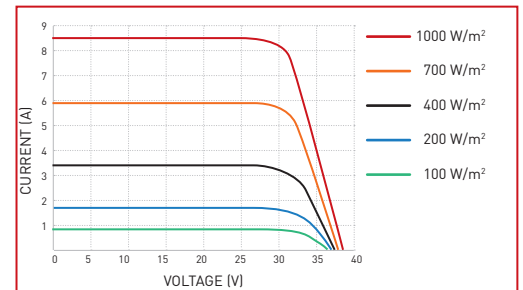

4) Average relative efficiency reduction of 5% at 200 W/m<sup>2</sup> according to EN 60904-1.

### Performance Warranty

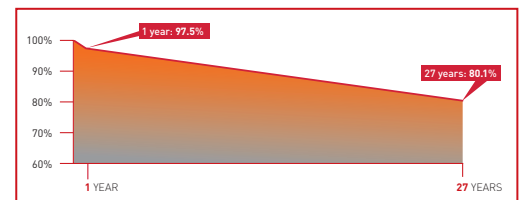

### Packaging Information

Quantity/Pallet	25
Pallets/Container (40'HC)	28
Quantity/Container (40'HC)	700

**CAUTION:** READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.

Specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order.

\* Vikram Solar and Eldora are Trademarks of Vikram Solar Limited registered in India

Share Your Query :

Samaarambh Solar Power Private Limited | Call: +919252389830, +919812406261 | production@solarsebiji.com | web: www.solarsebiji.com