



Multi-crystalline Solar PV Modules

ASP-7-AAA (AAA=300-330) | 72 Cells | 300-330 Wp

Highlights



More power/m² compared to industry average



Higher specific energy yield (kwh/kwp) due to superior cell + module engineering



Superior performance at NOCT and PCT conditions



Superior low light irradiation performance 200W/m²



Resistant to PID, salt mist and Ammonia



Triple EL checking to ensure defect free modules

Reduces installation costs by 2%



Reduces transport costs by 2%

Reduces land costs by 2%

Reduces BOS costs by 2%

Significant advantages of Adani multi-crystalline module

Current-voltage curve

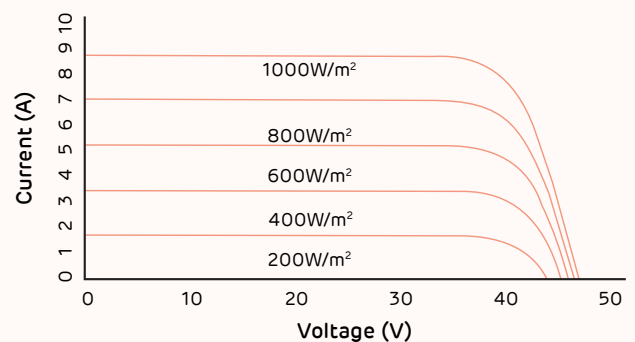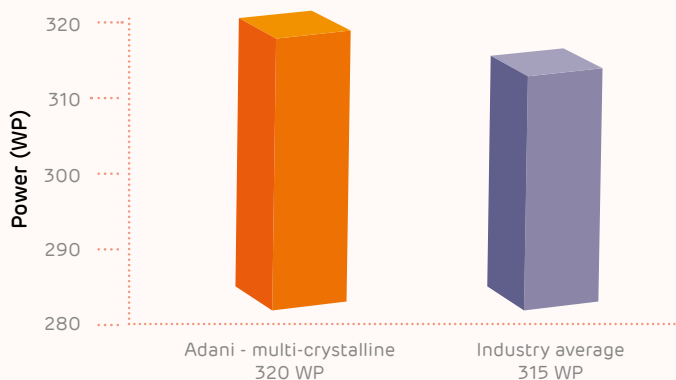


Note: Data is based on the comparison of the Adani -72 cells standard multi (320Wp) with industry's average of 315 Wp module for a scale of 1 MW installation and cost reduction will vary from site to site.

* "Adani Solar" is the brand name for legal entity "Mundra Solar PV Ltd." having its registered office at "Adani House, Nr Mithakhali Six Roads, Navrangpura, Ahmedabad 380 009, Gujarat, India" and manufacturing unit at "Revenue Survey No: 180/P City: Kutch Taluka: Mundra, Village: Tunda, Post office: Bidada; Pin: 370535".

Technical Data

Dimensions in mm

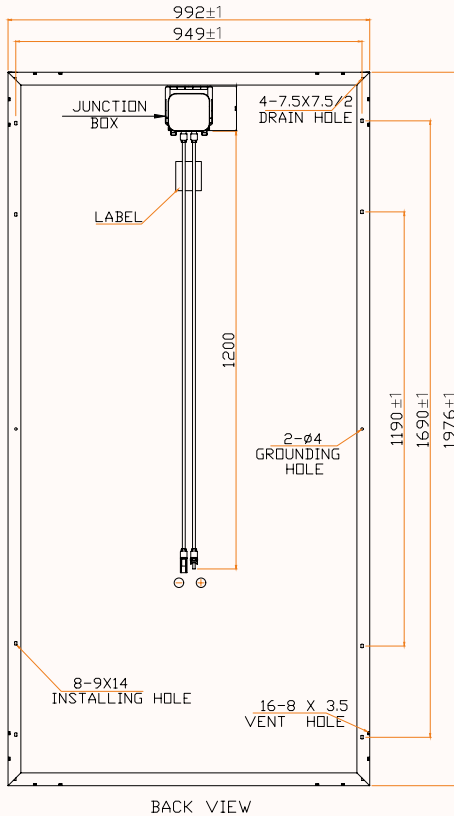

Electrical data – All data measured to STC *

Peak power, (0 ~+ 4.99 Wp) Pmax(Wp)	300	305	310	315	320	325	330
Maximum voltage, Vmpp (V)	34.92	35.26	35.61	36.01	36.41	36.81	37.21
Maximum current, Impp (A)	8.59	8.65	8.71	8.75	8.79	8.83	8.87
Open circuit voltage, Voc (V)	44.83	44.94	44.98	45.1	45.5	45.69	45.87
Short circuit current, Isc (A)	8.90	9.00	9.14	9.25	9.3	9.4	9.42
Module efficiency (%)	15.30	15.56	15.81	16.07	16.32	16.58	16.84

*STC: Irradiance 1000 W/m², cell temperature 25°C, air mass AM 1.5 according to EN 60904-3. Average efficiency reduction of 4.5 % at 200 W/m² according to EN 60904-1

Electrical parameters at NOCT

Pmax @ NOCT	217.9	223.1	227.5	232.0	238.4	242.5	246.8
Vmpp @ NOCT	34.59	34.64	34.47	34.47	34.65	34.54	34.61
Impp @ NOCT	6.3	6.44	6.6	6.76	6.88	7.02	7.13
Voc @ NOCT	41.8	42.1	42.3	42.5	42.7	42.9	43.1
Isc @ NOCT	6.9	7.02	7.17	7.3	7.43	7.57	7.8

*NOCT irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/sec

Temperature co-efficients (TC) and permissible operating conditions

TC of open circuit voltage (β)	-0.31% /°C
TC of short circuit current (α)	0.069 % /°C
TC of power (γ)	-0.42 % /°C
Maximum system voltage	1000 V (IEC & UL)
NOCT	45°C ± 2°C
Temperature range	-40°C to + 85°C

Mechanical data

Length	1976 mm
Width	992 mm
Height	35 mm / 40 mm
Weight	22 Kg (35 mm) / 27 Kg (40mm)
Junction box	IP67
Cable and connectors	1200 mm length cable, MC4 & Amphenol compatible connectors
Application class	Class A (Safety class II)
Superstrate	High transmittance ARC glass
Cells	72 multi-crystalline solar cells; 4 bus bars, 156.75 x 156.75 mm
Cell encapsulation	Superior dielectric strength & PID resistant EVA
Substrate	Tri layer backsheet
Frame	Anodized aluminium frame with twin wall profile
Mechanical load test as per IEC & UL	5400 Pa-front ; 2400 Pa-back
Maximum series fuse rating	15 A

Packing information

Container	40'HC
Pallets / Container	22
Pieces / Container	660

Warranty and certifications

Product warranty**
25 years linear power warranty

Performance guarantee**
Power Degradation < - 2.5 % in first year
< - 0.68 % / year in 2-25 years

Approvals and certificates: IEC 61215 Ed2, IEC 61730, IEC 61701, UL 1703, MCS, JET, CEC, CEC-Aus, IEC 62716



***Caution:**
Please read safety and installation instructions before using the product.

Share Your Query :
Samaarambh Solar Power Private Limited
Call: +919252389830,+919812406261
info@samaarambh.com
production@solarsebijli.com
website: www.solarsebijli.com

**** Warranty:**
Please read Adani solar warranty documents thoroughly.

